
ISU® 90I 4-D00R

Internal Airlift/ Helicopter Slingable Container Unit (ISU®)

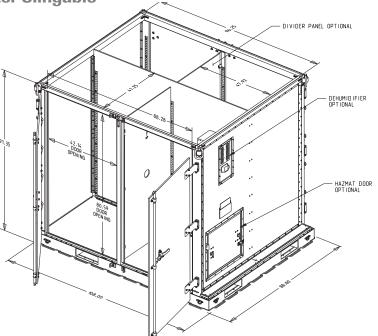

One example of an ISU® container configuration (ISU®'s can be customized to meet your specifications)

				- a	
P/N	NSN	COLOR	GSA	DLA	
*56116-000	8145-01-465-3685	GREEN	•	•	
*56216-000	8145-01-465-4199	TAN	•	•	
*56316-000	8145-01-465-4788	BLACK	•	•	
*56416-000	8145-01-465-4850	GRAY	•	•	
*56616-000	8145-01-465-5063	WHITE	•		
DIMENSIONS					
EXTERIOR	108"W X 88"L X 91.35"H				
INTERIOR	385 cu.ft.				
WEIGHT	PAYLOAD CAPACITY	MAX	MAXIMUM GROSS WEIGHT		
1,700 lbs.	10,000 lbs.	11	11,700 lbs.		

*Above part numbers are for containers only; no accessories



ISU® 90I loaded onto an aircraft

- See Military Certifications starting on page 2.1.4
- See Optional Kits starting on page 2.5.1
- See Optional Accessories starting on page 2.6.1



FEATURES

- Four doors two doors on each 108" side
- Equipped with aisleway for ease of loading aircraft
- Four-way forkliftable
- Intermodal transportable by air, land, sea or rail
- Stackable two-high when loaded with up to 10,000 lbs. or empty
- Compatible with standard military transport vehicles/equipment 2.5-ton and 5-ton - FMTV, LMTV, HEMTT, Flatrack, CROP, etc.
- · Base pre-drilled for optional caster set
- Ready for use with low or high-speed mobility wheel set
- All aluminum extruded, mechanically fastened pallet base certified not to damage aircraft roller systems
- · Winching rings located at every lower corner
- Retractable folding steps for easy roof access for sling hookup

For more information or for a single part number for a customized ISU[®] Container, call 800-355-2015