



NOMENCLATURE: LINE, MULTI-LOOP, CONCENTRIC TYPE

DESCRIPTION: Nylon webbing, Type XXVI, 1-3/4-inch wide

SEE CHART BELOW FOR DETAILS

APPLICABLE MILITARY SPECIFICATION/STANDARD: PIA-W-4088

**APPLICABLE MILITARY TECHNICAL REFERENCE: TM 10-1670-296-20&P / TO 13C7-49-2
FM 4-20.102 / TO 13C7-1-5**


PART NO.	NSN	LENGTH	LOOP	TEST LOAD
68F217-48	1670-01-062-6301	3 FT.	2	44,500
68F217-49	1670-01-062-6304	9 FT.	2	44,500
68F217-58	1670-01-063-7760	11 FT.	2	44,500
68F217-50	1670-01-062-6303	12 FT.	2	44,500
68F217-22	1670-01-063-7761	16 FT.	2	44,500
68F217-51	1670-01-062-6302	20 FT.	2	44,500
68F217-52	1670-01-062-6306	3 FT.	4	89,000
68F217-53	1670-01-062-6305	9 FT.	4	89,000
68F217-59	1670-01-062-6310	11 FT.	4	89,000
68F217-54	1670-01-062-6307	12 FT.	4	89,000
68F217-55	1670-01-062-6308	16 FT.	4	89,000
68F217-56	1670-01-064-4453	20 FT.	4	89,000
68F217-57	1670-01-062-6309	28 FT.	4	89,000
68F217-47	1670-01-064-4451	36 FT.	1	22,500

AVITEC Sp. z o. o.
ul. Wincentego Pola 35A
58-500 Jelenia Góra

NIP: 6112769246
REGON: 365522922
KRS: 0000634315

Contact:
+48 75 64-13-311
+48 75 64-13-319
office@avitec.pl

PART NO.	NSN	LENGTH	LOOP	TEST LOAD
68F217-45	1670-01-064-4452	60 FT.	1	22,500
68F217-30	1670-01-062-6313	60 FT.	3	67,500 135,000
68F217-32	1670-01-064-4454	60 FT.	6	
68F217-41	1670-01-062-6311	120 FT.	2	44,500
68F217-33	1670-01-062-6312	120 FT.	6	135,000
68F217-60	1670-01-107-7651	140 FT.	3	67,500
68F217-61	1670-01-107-7652	160 FT.	1	22,500
68F217-38	1670-00-040-8187	215 FT.	1	22,250
68F217-37	1670-00-040-8185	215 FT.	2	44,500
68F217-39	1670-00-040-8194	215 FT.	3	67,500
68F217-35	1670-00-040-8184	215 FT.	6	135,000

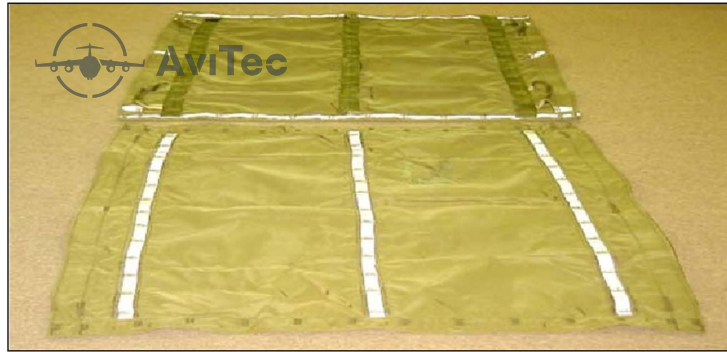

NOMENCLATURE: SLING, EXTRACTION LINE, PANEL (LINE BAG)

DESCRIPTION: Where Used: Is a universal panel that stows extraction lines and suspension slings for deployment. One or two panels are required depending upon their application. The body is made from nylon duck cloth. Three reinforcement straps are used and are located in the center and outside of the body at positions 3-1/2-inches from each side of the body. Three tie-down straps with 12 each tie strap loops are also used and are located in the center and inside of the body at positions which are the same as the reinforcement straps. Four strap handles are located on the outside of the body. Two closing straps are located at each side of the body. Six closing loops are used; three on the outside and three on the inside of the body. Special Features: Accommodates extraction line and suspension slings, portable, used with all approved extraction line for C-130 and C-17 aircraft. Equipment Data: Length: 41 inches. Width: 38 inches. Material: Cloth, duck, nylon, 12.5 oz. Weight: 2 lb.

NSN: 1670-01-183-2678

P/N: 11-1-2881

**APPLICABLE MILITARY TECHNICAL REFERENCE: TM 10-1670-286-20 / TO 13C5-2-41
FM 4-20.102 / TO 13C7-1-5**

AVITEC Sp. z o. o.
ul. Wincentego Pola 35A
58-500 Jelenia Góra

NIP: 6112769246
REGON: 365522922
KRS: 0000634315

Contact:
+48 75 64-13-311
+48 75 64-13-319
office@avitec.pl